

Type	
Project	
Notes	



ADL-UWL Series

UNDERWATER LIGHT

For pool, fountain, aquarium

External driver - 2 metres of power cable

U-shape bracket for adjustable angle

Stainless steel

High Molybdenum content corrosion resistant

Professional optical reflector




Left: Frosted glass lens

Right: Silk-screen glass lens

PRODUCT SPECIFICATIONS

Summary	ADL - UWL - 0901C
Lumen Output (lm)	750 lm
Power consumption	9 W
Dimensions (mm)	Ø 61 x 110 mm
Voltage	24 V DC
Colour Temperature	3000k, 4000k, 5000k, Red, Green, Blue
IP	68
Warranty	5 years

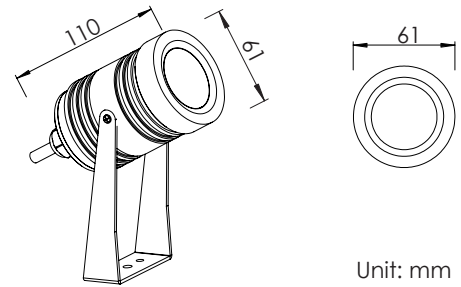

ADL-UWL-0901C Ø 61 x 110

Unit: mm

*units in mm

ORDER FORM

ADL-UWL-0901C				
---------------	--	--	--	--

1

2

3

4

5

1. FAMILY	2. BEAM ANGLE	3. CCT	4. LENS OPTIONS	5. ACCESSORIES
ADL-UWL-0901C	1 20°	30 3000K	1 Frosted glass lens	A Mounting Spike
	2 30°	35 3500K	2 Silk-screen glass lens	B Single fixture junction box
	3 38°	40 4000K		C Continuous fixture junction box
		R Red		
		G Green		
		B Blue		