



Type	
Project	
Notes	


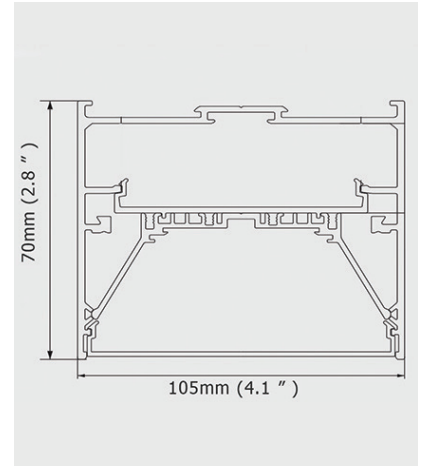


## Linear Luminaire - L10570

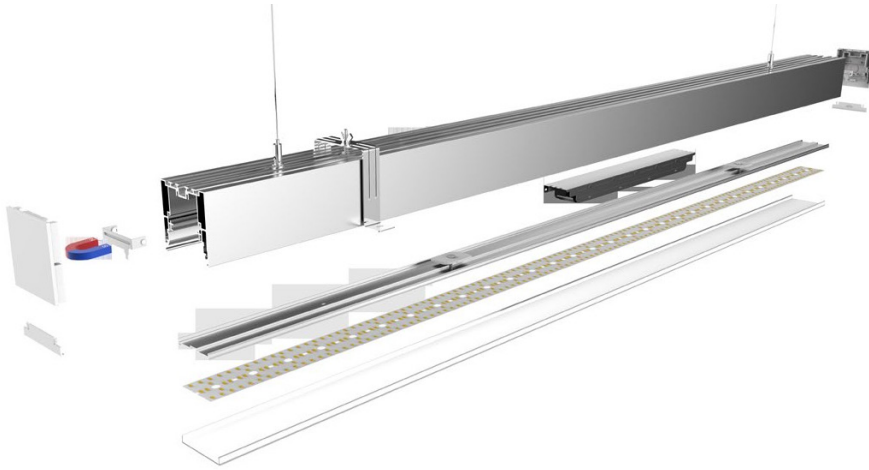

## PRODUCT SPECIFICATIONS

Model	L10570
Length	1200 or 2500 mm
Lumen Output	120 lm/W or 110 lm/W
CRI	80 or 90
Voltage	120 - 277V AC
Colour Temperature	3000k 4000k 5000k RGBW
Installation	Pendant Surface mounted
Beam Angle	104 °
Certification	cETLus, CE, RoHS
Warranty	5 years



PDM Cover



## ORDER FORM

L10570								104	
1	2	3	4	5	6	7	8	9	OPTIONS

1. FAMILY	2. SIZE	3. OUTPUT LEVEL	CRI*	4. VOLTAGE	5. CCT
L10570	<b>12</b> 1200mm	<b>A</b> 720 lm @ 6 W / ft	<b>80</b>	<b>27</b> 100 - 277V AC	<b>30</b> 3000K
	<b>25</b> 2500mm	<b>B</b> 1200 lm @ 10 W / ft	<b>80</b>	<b>34</b> 347V AC	<b>35</b> 3500K
		<b>C</b> 660 lm @ 6 W / ft	<b>90</b>		<b>40</b> 4000K
		<b>D</b> 1100 lm @ 10 W / ft	<b>90</b>		<b>50</b> 5000K
					<b>W</b> RGBW

\*Lumen output and CRI have restricted corresponding values

6. INSTALLATION*	7. COLOUR	8. DIMMING	9. LENS
<b>P</b> Pendant	<b>1</b> Silver	<b>1D</b> No Dimming	<b>104</b> PDM
<b>S</b> Surface mounted	<b>2</b> Black	<b>2D</b> 0-10V Dimming	
	<b>3</b> White	<b>3D</b> TRIAC Dimming	
		<b>4D</b> DMX	
		<b>5D</b> Dali	
		<b>6D</b> Lutron Hi-Lume	

OPTIONS	MOUNTING	CONNECTORS
	<b>M1</b> L-PTB	<b>C1</b> L-10570D-90L
	<b>M2</b> L-PT	<b>C2</b> L-10570D-90W
	<b>M3</b> L9086-BI	<b>C3</b> L-10570D-90N
	<b>M4</b> L-SM	<b>C4</b> L-10570D-90T
	<b>M5</b> L-PTB-NPF	<b>C5</b> L-10570D-90X
	<b>M6</b> L-PTB-PF	<b>C6</b> L-45-180

## OPTIONAL ACCESSORIES

### MOUNTING

- M1** L-PTB
- M2** L-PT
- M3** L9086-BI
- M4** L-SM
- M5** L-PTB-NPF
- M6** L-PTB-PF




M1



M2



Wall mounting bracket M3



Mounting screws M4




Suspension cable without power feed M5




Suspension cable with power feed M6

### CONNECTORS


- C1** L-10570D-90L
- C2** L-10570D-90W
- C3** L-10570D-90N
- C4** L-10570D-90T
- C5** L-10570D-90X
- C6** L-79-180




(L\*W\*H) 200\*200\*105 mm C1

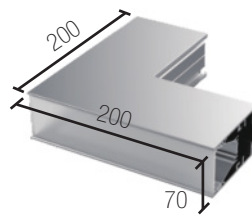


(L\*W\*H) 200\*200\*70 mm C2

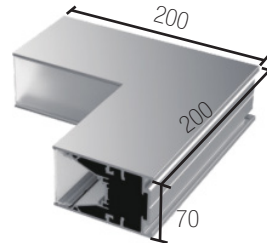

(L\*W\*H) 200\*200\*70 mm C3

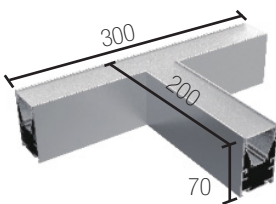

(L\*W\*H) 300\*200\*70 mm C4

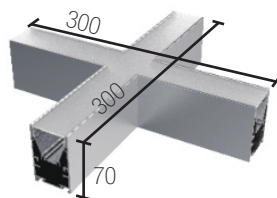

(L\*W\*H) 300\*300\*70 mm C5



Connection bracket C6