

Type

Project

Notes



ADVANT
LIGHTING



AP-FR4E

Round Downlight Regressed Trim

Housing-free light engine install quickly.

Ease of installation, fast-mount features.



*Ra80 is only with 2700K and 3000K



IP20
RATED & TESTED

5 YEARS
LIMITED WARRANTY
INCLUDED

TECHNICAL DRAWING

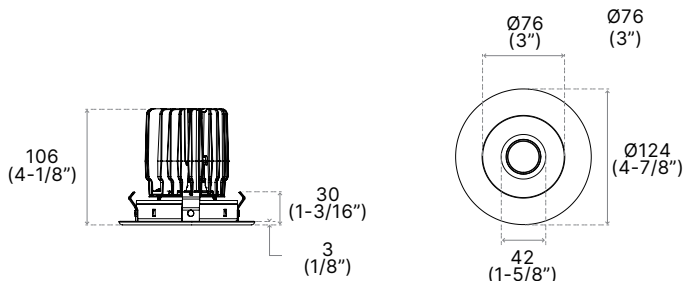

Units in Metric

PRODUCT SPECIFICATIONS

Summary	AP-FR-4E-10	AP-FR-4E-15	AP-FR-4E-24
Dimensions	Ø124mm x 106mm	Ø124mm x 106mm	Ø124mm x 106mm
Power Consumption	10 W	15 W	24 W
Lumen Output	750 lm	1125 lm	1800 lm
Input Voltage	120-277V AC		
Colour Temperature	2700K, 3000K, 3500K, 4000K		
Finish	Gold, Chrome, White, Brushed Nickel, Satin Nickel, Black		
CRI	*Ra80, Ra90		
Beam Angle	16° (Spot), 32° (Narrow Flood), 48° (Flood)		
Warranty	5 Years		

ORDER FORM

1	2	3	4	5	6	7	8	9
1. FAMILY	2. SIZE	3. WATTAGE	4. VOLTAGE	5. CCT				
AP-FR	4E Ø124 x 106	10 10W 15 15W	24 24W	A 120-277V AC	27 2700K 30 3000K	35 3500K 40 4000K	WD Warm Dimming (15W Only)	
6. DIMMING	7. CRI	8. BEAM ANGLE	9. FINISH					
DM 0-10V Dimming TRI TRIAC Dimming	80 *Ra80 90 Ra90	16 16° 32 32° 48 48°	CH Chrome AL Aluminum SN Satin Nickel BN Brushed Nickel WH White BK Black					



advantlighting.ca
(604) 207 9879

© Advant Lighting, LTD. All rights reserved. We reserve the right to change design, materials and finish in any way that will not alter installed appearance or reduce function and performance.

#105-8288 North Fraser Way,
Burnaby, BC V3N 0E9

Type

Project

Notes



ADVANT
LIGHTING


OPTIONS & ACCESSORIES

MOUNTING PLATE


Ideal for unfinished basements and other renovation projects.
Choice of Square or Round for 3.5" Remodel housings.
Adjustable mounting bars included.



CODE	DESCRIPTION	HOLE DIAMETER	DIMENSIONS
P4RN	Without Mounting Bars	Ø108 (4-1/4")	165 x 337 (6-1/2" x 13-1/4")
P4RNW	With Mounting Bars	Ø109 (4-5/16")	388 x 254 ~ 622 (15-5/16" x 10" ~ 24-1/2")



P4RN

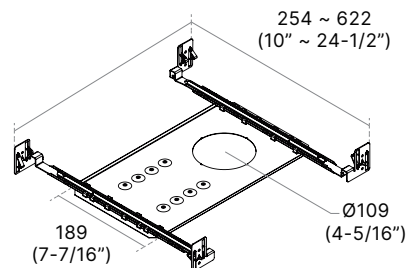

P4RNW

LENSES

Choice of replacement lenses for on-site modification of light diffusion.
Shower Light trims available only with Frosted lens.
*Wall Wash trims available only with Frosted/Frosted lens.



CL Clear



FR Frosted



LN Linear




FC Frosted Clear Center



SL Solite



PR Prismatic



HC Honeycomb



Type

Project

Notes



HOUSINGS





REMODEL IC

REUR	4	V	
------	---	---	--

1. MODEL	2. SERIES	3. VOLTAGE	4. DIMMING
----------	-----------	------------	------------

REUR	Remodel Housing	4 4"	V 120-277V AC	E1 ELV 10W E2 ELV 15W EB2 ELV (+VALUE) 15W	D1 0-10V 10W D2 0-10V 15W D3 0-10V 24W ND Non-dimmable 15W
-------------	-----------------	-------------	----------------------	---	---

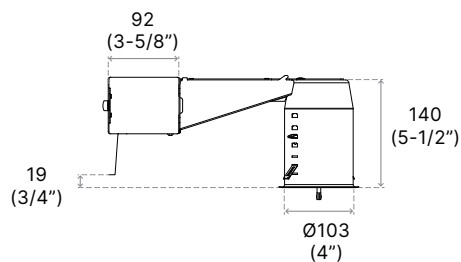

NEW CONSTRUCTION IC



NWUR	4	V	
------	---	---	--

1. MODEL	2. SERIES	3. VOLTAGE	4. DIMMING
----------	-----------	------------	------------

NWUR	New Construction Housing	4 4"	V 120-277V AC	E1 ELV 10W E2 ELV 15W EB2 ELV (+VALUE) 15W	D1 0-10V 10W D2 0-10V 15W D3 0-10V 24W ND Non-dimmable 15W
-------------	--------------------------	-------------	----------------------	---	---

5. OPTION

EM Emergency Back up

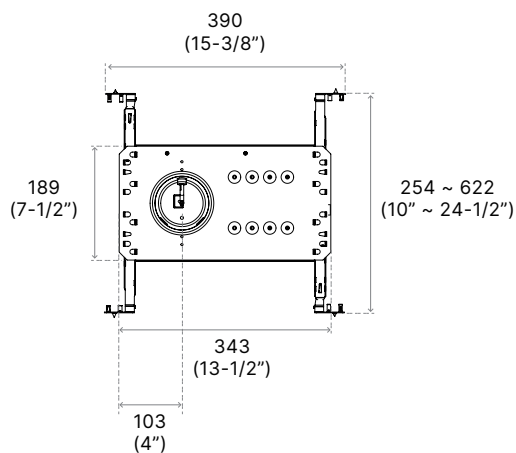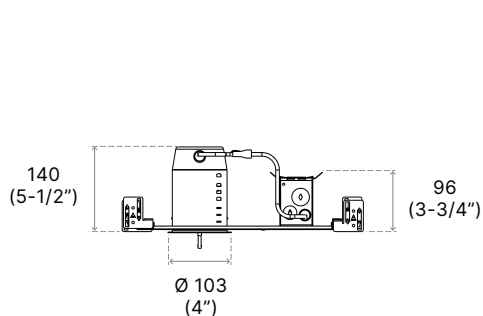

Type

Project

Notes



HOUSINGS



Classic New Construction IC

ISUR		4	V		
1. MODEL	2. SERIES	3. VOLTAGE	4. DIMMING		
ISUR	IC and Air Tight Housing	4 4"	V 120-277V AC	E1 ELV 10W E2 ELV 15W EB2 ELV (+VALUE) 15W	D1 0-10V 10W D2 0-10V 15W D3 0-10V 24W ND Non-dimmable 15W

