

Type

Project

Notes



AD-P0514

Intended for indoor use

Pendant mounting

Luxury design applications

Fiber glass cover



IP20
RATED & TESTED


IESNA
LM-80

IESNA
LM-79



5 YEARS
LIMITED WARRANTY
INCLUDED

TECHNICAL DRAWING

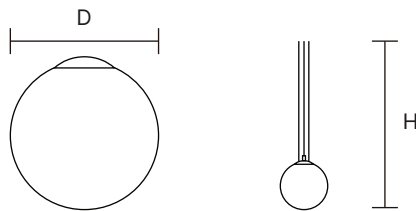

AD-P0514-8A: D Ø8" x H 59.06"

AD-P0514-12A: D Ø12" x H 59.06"

AD-P0514-16A: D Ø16" x H 59.06"

AD-P0514-20A: D Ø20" x H 59.06"

Units in Metric

PRODUCT SPECIFICATIONS

Summary	AD-P0514-8A	AD-P0514-12A	AD-P0514-16A	AD-P0514-20A
Dimensions	D Ø8" x H 59.06"	D Ø12" x H 59.06"	D Ø16" x H 59.06"	D Ø20" x H 59.06"
Power Consumption	10W	14W	22W	28W
Lumen Output	700 lm	980 lm	1,540 lm	1,960 lm
Input Voltage	120V AC	120V AC	120V AC	120V AC
CCT	3000K, 3500K, 4000K	3000K, 3500K, 4000K	3000K, 3500K, 4000K	3000K, 3500K, 4000K
IP Rating	IP20	IP20	IP20	IP20
CRI	Ra90	Ra90	Ra90	Ra90
Finish	White	White	White	White

ORDER FORM

1	2	3	4	5	6	7
1. FAMILY	2. SIZE	3. WATTAGE	4. VOLTAGE	5. CCT	6. DIMMING	7. FINISH
AD-P0514	8A 8" 12A 12" 16A 16" 20A 20"	10 10W 14 14W 22 22W 28 28W	A 120V AC	30 3000K 35 3500K 40 4000K	NN None DM 0-10V TRI TRIAC	WH White