

Type

Project

Notes



### AVL-L06282

LED LINEAR SUSPENSION LIGHT


Aluminum 6063 casing and PMMA diffuser

Aluminum die-casting alloy and caps

Various mounting options



## TECHNICAL DRAWING

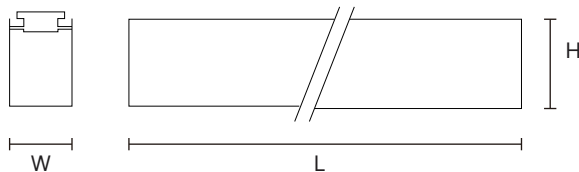

- AVL-L06282-2: L 570 x W 62 x H 82
- AVL-L06282-3: L 850 x W 62 x H 82
- AVL-L06282-4A: L 1135 x W 62 x H 82
- AVL-L06282-4B: L 1135 x W 62 x H 82
- AVL-L06282-5: L 1410 x W 62 x H 82

Units in Metric

## PRODUCT SPECIFICATIONS

Summary	AVL-L06282-2	AVL-L06282-3	AVL-L06282-4A	AVL-L06282-4B	AVL-L06282-5
Dimensions	570x62x82	850x62x82	1135x62x82	1135x62x82	1410x62x82
Power Consumption	15 W	22 W	30 W	40 W	40 W
Lumen Output	1650 lm	2420 lm	3300 lm	4400 lm	4400 lm
Efficacy	110 lm/W	*	*	*	*
Input Voltage	120-277V AC	*	*	*	*
Colour Temperature	3000K, 3500K, 4000K	*	*	*	*
CRI	Ra80, Ra90	*	*	*	*
Beam Angle	20°, 100°	*	*	*	*
IP Rating	IP20	*	*	*	*
Warranty	5 Years	*	*	*	*

\*share the same spec

## ORDER FORM

1	2	3	4	5	6	7	8	9						
1. FAMILY	2. SIZE	3. VOLTAGE	4. CCT	5. CRI	7. BEAM ANGLE	8. COLOUR	9. MOUNTING							
AVL-L06282	2	570x62x82	A	120-277V AC	30	3000K	80	Ra80	20D	20°	WH	White	PD	Pendant
	3	850x62x82			35	3500K	90	Ra90	100D	100°	SV	Silver	SF	Surface
	4A	1135x62x82			40	4000K					BK	Black	RC	Recessed
	4B	1135x62x82									—	Custom	WL	Wall
	5	1410x62x82												
					6. DIMMIING									
					NN	None								
					DM	0-10V								
					TRI	TRIAC								