

Type

Project

Notes




ADVANT LIGHTING



AVL-L4067

Linear Luminaire




Pendant Mount



Wall Mount




Surface Mount



PDM Cover



TECHNICAL DRAWING



AVL-L4067-12: W 40mm x H 67mm x L 1200mm
(W 1.57" x H 2.64" x L 47.24")

AVL-L4067-25: W 40mm x H 67mm x L 2500mm
(W 1.57" x H 2.64" x L 98.43")

Units in Metric

PRODUCT SPECIFICATIONS

Summary	AVL-L4067-12	AVL-L4067-25
Dimensions	W 40 mm x H 67mm x L 1200mm	W 40 mm x H 67mm x L 2500mm
Power Consumption	6W or 10W	6W or 10W
Lumen Output	110 lm/W or 90 lm/W	110 lm/W or 90 lm/W
Input Voltage	100-277V AC, 347V AC	100-277V AC, 347V AC
Colour Temperature	3000K, 3500K, 4000K, 5000K, RGBW	3000K, 3500K, 4000K, 5000K, RGBW
Beam Angle	90° (PDM) or 65° (UGR<19)	90° (PDM) or 65° (UGR<19)
Finish	Silver, Black, White	Silver, Black, White
CRI	Ra80, Ra90	Ra80, Ra90
Warranty	5 Years	5 Years

ORDER Form

Next Page

Type _____
 Project _____
 Notes _____



ORDER FORM














1 2 3 4 5 6 7 8 9 OPTIONS

1. FAMILY	2. SIZE	3. OUTPUT LEVEL	CRI	4. VOLTAGE	5. CCT
AVL-L4067	12 1200mm	A 600 lm @ 6 W/ft	Ra80	A 100-277V AC	30 3000K RGBW RGBW
	25 2500mm	B 1100 lm @ 10W/ft	Ra80	B 347V AC	35 3500K
		C 540 lm @ 6W/ft	Ra90		40 4000K
		D 900 lm @ 10/ft	Ra90		50 5000K

*Lumen output and CRI have restricted corresponding values

6. INSTALLATION	7. FINISH	8. DIMMING	9. LENS
P Pendant W Wall Mount S Surfac Mount	SV Silver BK Black WH White	NN None DM 0-10V TRI TRIAC	DMX DMX DL DALI LT Lutron Hi-Lume

OPTIONS	CONNECTORS	MOUNTING	ACCOUSTIC	
	C1 L-4067D-90L C4 L-4067D-90T C2 L-4067D-90W C5 L-4067D-90X C3 L-4067D-90N C6 L-45-180	M1 L-PTB-S M2 L-PT-S M3 L-WM	M4 L-CM M5 L-PTB-NPF-S M6 L-PTB-PF-S	A1 SOUND ABSORPTION

					
C1: 150 X 150 X 67 mm	C2: 150 X 150 X 49 mm	C3: 150 X 150 X 67 mm	M1: Pendant Cable With Canopy	M2: Pendant Cable	M3: Wall Mount Bracket
					
C4: 300 X 200 X 67mm	C5: 300 X 300 X 67 mm	C6: Connectors	M4: Ceiling Mount Bracket	M5: Suspension Cable without Power Feed	M6: Suspension Cable with Power Feed

Type

Project

Notes



ADVANT LIGHTING

Sound Absorption Features



Sound Absorption
Acoustic Standard NRC0.75




Damp-proof rated
Anti-moisture




Eco-friendly
Made out of polyester fibre

Diagram

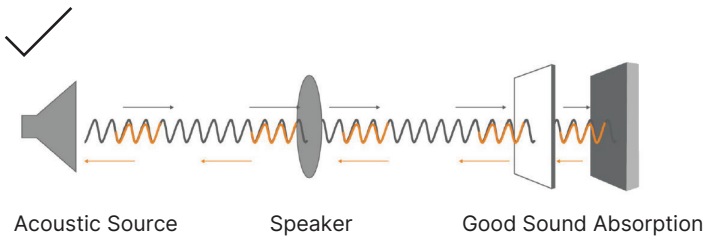

Colour Cards

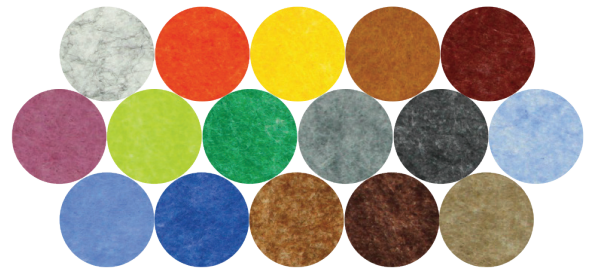

Poor quality sound absorption material reflects the sound

